


Britclips® Beam Clip

for flange 2 - 30 mm

(J 05 105)

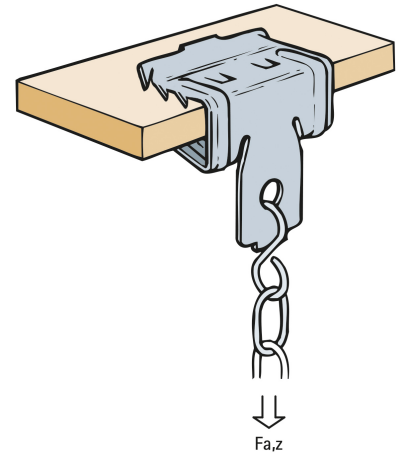


Features and benefits

- for a solid fixing to steel construction without the need for welding or drilling
- with fixing hole (Ø 6.5 mm) to fix S-hook, bolt/nut, etc.
- material: spring steel (type CS70)
- surface treatment: Delta-Tone 9000 (480 hours)

| Part No. | Code | A (mm) | h (mm) | F _{a,z} (N) | Pack 1 |
|------------|--------|-----------|-----------|-------------------------|--------|
| EM50020004 | BC125 | 2 - 4 | 27 | 450 | 100 |
| EP50020004 | BC125 | 2 - 4 | 27 | 450 | 25 |
| EM50020009 | BC250 | 4 - 8 | 39 | 950 | 100 |
| EP50020009 | BC250 | 4 - 8 | 39 | 950 | 25 |
| EM50020016 | BC500 | 8 - 14 | 41 | 950 | 100 |
| EP50020016 | BC500 | 8 - 14 | 41 | 950 | 25 |
| EM50020020 | BC750 | 14 - 20 | 47 | 950 | 100 |
| EP50020020 | BC750 | 14 - 20 | 47 | 950 | 25 |
| EM50020030 | BC1000 | 20 - 28 | 56 | 950 | 100 |

For use with static loads only.

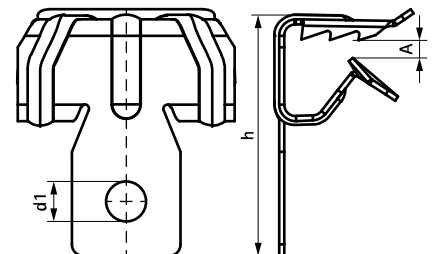

Complementary
BIS S-Hook

Alternative
Britclips® Tiger