


Product Code: CUEB12

Luckinslive 435925983

Description: 12 Way Unpopulated Metal Consumer Unit

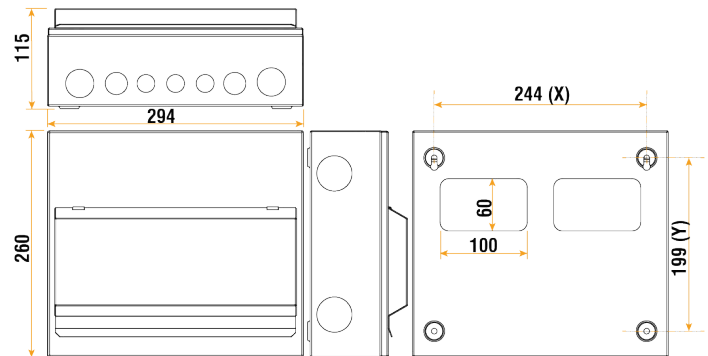

General Information

Dimensions With Door (mm)	294 (W) x 260 (H) x 115 (D)	
Enclosure Dimensions (mm)	294 (W) x 260 (H) x 92 (D)	
Colour	White	
Materials	Enclosure & Cover: Powder Coated Steel	DIN Rail: Galvanised Steel
Rated Operational Voltage (AC) (Ue)	230	
Frequency (Hz)	50/60	
Maximum Rated Current (A) (In)	100	
Free Ways	12	
Total Ways	12	
Blanks Supplied	2 (Product Code: CU1BLANK)	
E&N Terminals	Screw	
E&N Bars Capacity (mm ²)	16	E&N Bars Torque (Nm) 2
Tail Clamp Capacity (mm ²)	25	Tail Clamp Torque (Nm) 1.5
Enclosure Side Knockouts (Ømm)	2 x 40	
Enclosure Top Knockouts (Ømm)	4 x 20 & 2 x 40	
Enclosure Bottom Knockouts (Ømm)	3 x 20, 2 x 25 & 2 x 32	
Enclosure Rear Knockouts (mm)	2 x 100 x 60	
Impact Rating	IK05	
Ingress Protection	IP20	
Maximum Humidity (%)	95	
Storage Temperature (°C)	-40 to +75	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Standards BS EN 61439-3

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

Elucian metal consumer units allow compliance with BS 7671 Wiring Regulations
Complete complement of earth and neutral terminals along with marking labels, busbar, mains cable clamp, blanks, 40mm meter tail gland, premium black grommet strip and instruction leaflet.