


TAURUS

IP65 BULKHEAD

Taurus is a low profile, compact bulkhead that is ideal for lighting thresholds or simply providing amenity lighting. Suitable for ceiling or wall mounting, Taurus is available with the option of integral photocell control and microwave presence detector.

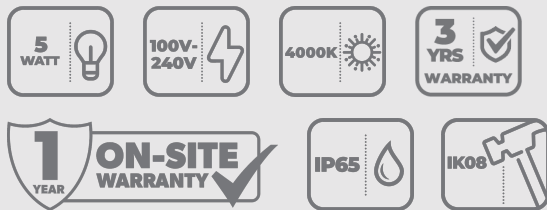

Features

- Robust, low profile design
- Fitted with a neat bezel trim, to provide a smart appearance
- Suitable for wall or ceiling mounting
- Multi voltage driver, suitable for site lighting as well as residential use



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
TA05	Taurus IP65 Bulkhead	460lm (without trim) 380lm (with trim)		5W	76 lm/W 92 lm/W

Product Information

Warranty	3 Years
On-Site Warranty	1 Year
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK08
Voltage	100-240V
Material (Body/Housing)	Polycarbonate
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Colour Finish	Black RAL9005
LED Life Expectancy	L80B50 54,000 Hours
Power Factor	>0.7
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class II
Working Temperature	-10°C to 40°C

TAURUS

IP65 BULKHEAD

Packaging Information

Dimensions (mm)	L: 249 x W: 129 x D: 97 mm
Product Net Weight (kg)	0.449 kg
Barcode	5055807623322
Box Dimensions (mm)	L: 256 x W: 130 x D: 100 mm
Box Gross Weight (kg)	0.576 kg

Units/Outer Carton	20
Outer Carton Barcode	15055807623329
Outer Carton Dimensions (mm)	L: 655 x W: 270 x D: 425 mm
Outer Carton Gross Weight (kg)	12.5 kg

