



YOUR ESSENTIALS

**HALOGEN
FREE**



Cable Termination

Cord End Twin Wire Terminals


- Operating Temperature: -40°C ~ +105°C
- Max. Voltage Rating: 600V
- Flared barrel for easy wire insertion

Current rating based on:

- Single conductor in free air
- Ambient temperature of 35°C
- Conductor temperature rise of 35°C

Materials:

- 1.** Conductor: Copper **2.** Insulation: Nylon **3.** Plating: Tin

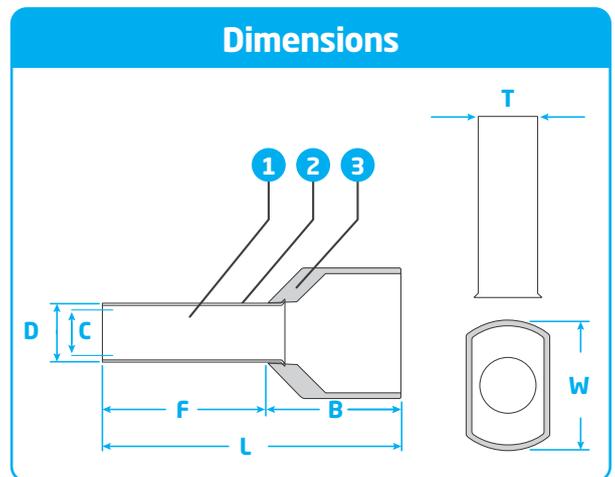

Part No.	Colour	Dimensions (mm)							Lead Section (mm ²)	Conductor or CSA (each)	BS6231 Peak Amp
		F	L	W	B	D	C	T			
YET0.5W	White	8.0	14.5	5.0	6.5	1.8	1.5	0.15	2 x 0.5mm ²	0.5mm ²	11A
YET0.75G	Grey	8.0	14.8	5.5	6.7	2.1	1.8	0.15	2 x 0.75mm ²	0.75mm ²	14A
YET1RE	Red	8.0	15.1	5.5	7.1	2.3	2.0	0.15	2 x 1.0mm ²	1.0mm ²	17A
YET1.5B	Black	8.0	15.5	6.4	7.2	2.6	2.3	0.15	2 x 1.5mm ²	1.5mm ²	21A
YET2.5BL	Blue	10.0	18.5	8.0	8.8	3.3	2.9	0.2	2 x 2.5mm ²	2.5mm ²	30A
YET4G	Grey	12.0	23.1	8.8	11.1	4.2	3.8	0.2	2 x 4.0mm ²	4.0mm ²	41A
YET6YE	Yellow	14.0	26.1	9.5	12.1	5.3	4.9	0.2	2 x 6.0mm ²	6.0mm ²	53A
YET10RE	Red	14.0	26.1	12.6	12.0	6.9	6.5	0.2	2 x 10.0mm ²	10.0mm ²	75A